

LINCE VERSO 2M

LINCE VERSO 2M INDOOR

INSTRUCCIONES DE MONTAJE

MOUNTING INSTRUCTIONS

MONTAGEANLEITUNG

INSTRUCTIONS DE MONTAGE



	Serie	Manufactura	LED SMD	Watt	Watt	kg	mm	Tc
LCEVERSO2M	LCV.2M.08000	A453 B160 H229	50W	56W	7.7Kg	0.18-0.28	Tc 85°C	
LCEVERSO2M	LCV.2M.10000	A453 B160 H229	65W	74W	7.7Kg	0.24-0.37	Tc 85°C	
LCEVERSO2M	LCV.2M.13000	A453 B160 H229	90W	99W	7.7Kg	0.32-0.50	Tc 85°C	
LVIVERSO2M	LVI.2M.08000	A453 B160 H229	50W	56W	7.7Kg	0.18-0.28	Tc 85°C	
LVIVERSO2M	LVI.2M.10000	A453 B160 H229	65W	74W	7.7Kg	0.24-0.37	Tc 85°C	
LVIVERSO2M	LVI.2M.13000	A453 B160 H229	90W	99W	7.7Kg	0.32-0.50	Tc 85°C	

LEC
Light Environment Control


Polígono Industrial El Olivar, parcela M-15 · 11160 Barbate (Cádiz) España-Spain







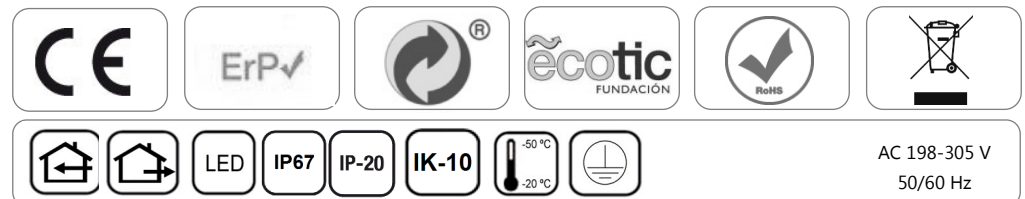

Tel.: +34 956 454 130 ·

info@lecsl.com | www.lecsl.com



“Empresa certificada en diseño y fabricación de luminarias LED”



 	 Ref.		 f		 Tw	 Tc
DRIVER (LCV.2M.08000)	LECLAY0070CFNT000	198-305 V	50/60 Hz	0.18-0.28A	Tw 80°C	Tc 85°C
DRIVER (LCV.2M.10000)	LECLAY0090CFNT001	198-305 V	50/60 Hz	0.24-0.37A	Tw 80°C	Tc 85°C
DRIVER (LCV.2M.13000)	LECLAY0110CFNT001	198-305 V	50/60 Hz	0.32-0.50A	Tw 80°C	Tc 85°C
DRIVER (LVI.2M.08000)	LECLAY0070CFNT002	198-305 V	50/60 Hz	0.18-0.28A	Tw 80°C	Tc 85°C
DRIVER (LVI.2M.10000)	LECLAY0090CFNT000	198-305 V	50/60 Hz	0.24-0.37A	Tw 80°C	Tc 85°C
DRIVER (LVI.2M.13000)	LECLAY0110CFNT000	198-305 V	50/60 Hz	0.32-0.50A	Tw 80°C	Tc 85°C



ES Realizar periódicamente una limpieza de los componentes

DE Reinigen Sie die nichtelektronischen Komponenten

EN Clean the non-electronic components regularly with a cloth.

FR Réaliser de manière périodique le nettoyage des composants non électroniques avec un chiffon.

