

TRAFALGAR ATEX

INSTRUCCIONES DE MONTAJE

MOUNTING INSTRUCTIONS

MONTAGEANLEITUNG

INSTRUCTIONS DE MONTAGE




	Serie	Material	LED SMD	W	kg	A	Tc
TRAFALGAR ATEX	TRAX.48.01000	A485 BØ157 H173	9W	10W	3,9 Kg	0.04-0.05	Tc 70°C
TRAFALGAR ATEX	TRAX.48.02000	A485 BØ157 H173	16W	19W	4,2 Kg	0.07-0.10	Tc 70°C
TRAFALGAR ATEX	TRAX.75.02000	A750 BØ157 H173	16W	19W	5,3 Kg	0.07-0.10	Tc 70°C
TRAFALGAR ATEX	TRAX.75.04000	A750 BØ157 H173	33W	37W	5,3 Kg	0.14-0.19	Tc 70°C
TRAFALGAR ATEX	TRAX.13.04000	A1360 BØ157 H17	33W	37W	6,2 Kg	0.14-0.19	Tc 70°C




Polígono Industrial El Olivar, parcela M-15 · 11160 Barbate (Cádiz) España-Spain
Tel.: +34 956 454 130 · Fax: +34 956 432 688
info@lecsl.com | www.lecsl.com



“Empresa certificada en diseño y fabricación de luminarias LED”



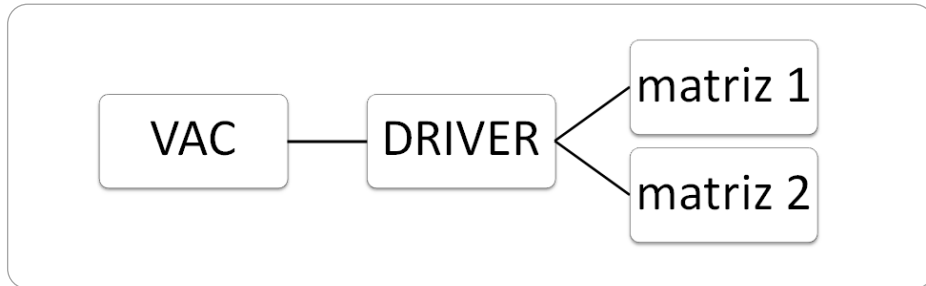

ES Realizar periódicamente una limpieza del difusor con un paño húmedo.

EN Clean the diffuser with a damp cloth

DE Reinigen Sie den Diffuser mit einem feuchten Tuch.

FR Nettoyer périodiquement les diffuseurs avec un chiffon humide.

