

TRAFALGAR ATEX KIT EMERGENCIA

INSTRUCCIONES DE MONTAJE

MOUNTING INSTRUCTIONS

MONTAGEANLEITUNG

INSTRUCTIONS DE MONTAGE



	Serie	Material	LED SMD	Wattaje	Peso	Altura	Tc
T. ATEX KIT EME.	TXKE.48.0400	A485 BØ157 H173	14W	17W	3,9 Kg	0.06-0.09	Tc 70°C
T. ATEX KIT EME.	TXKE.48.0700	A485 BØ157 H173	22W	26W	4,2 Kg	0.10-0.13	Tc 70°C
T. ATEX KIT EME.	TXKE.75.0700	A750 BØ157 H173	22W	26W	5,3 Kg	0.10-0.13	Tc 70°C
T. ATEX KIT EME.	TXKE.13.0700	A1360 BØ157 H17	40W	44W	6,2 Kg	0.17-0.22	Tc 70°C




Polígono Industrial El Olivar, parcela M-15 · 11160 Barbate (Cádiz) España-Spain
Tel.: +34 956 454 130 · Fax: +34 956 432 688
info@lecsl.com | www.lecsl.com



“Empresa certificada en diseño y fabricación de luminarias LED”



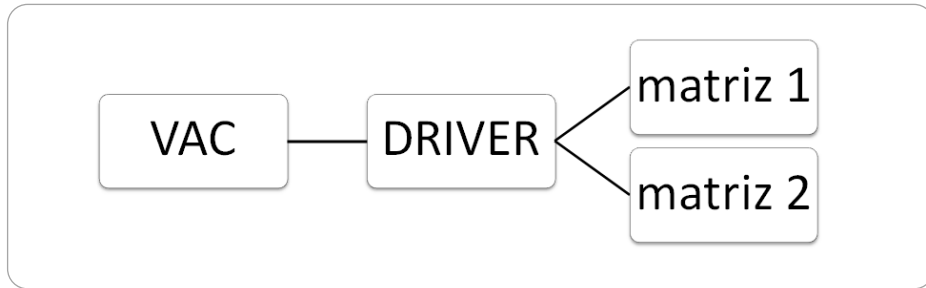

ES Realizar periódicamente una limpieza del difusor con un paño húmedo.

EN Clean the diffuser with a damp cloth

DE Reinigen Sie den Diffuser mit einem feuchten Tuch.

FR Nettoyer périodiquement les diffuseurs avec un chiffon humide.

