

LINCE EFFICACY 4M

LINCE EFFICACY 4M INDOOR



ES Realizar periódicamente una limpieza de los componentes no electrónicos con un paño.

DE Reinigen Sie die nichtelektronischen Komponenten regelmäßig mit einem Tuch.

EN Clean the non-electronic components regularly with a cloth.

FR Réaliser de manière périodique le nettoyage des composants non électroniques avec un chiffon.

INSTRUCCIONES DE MONTAJE

MOUNTING INSTRUCTIONS

MONTAGEANLEITUNG

INSTRUCTIONS DE MONTAGE



Serie

WARRANTY

LED SMD

WATT

kg

A

Tc

L. EFFICACY 4M	LCE/LEI.4M.17000	A345 B342 H513	97W	114W	15.2Kg	0.35-0.54	Tc 85°C
L. EFFICACY 4M	LCE/LEI.4M.23500	A345 B342 H513	147W	163W	15.2Kg	0.53-0.82	Tc 85°C
L. EFFICACY 4M	LCE/LEI.4M.30000	A345 B342 H513	195W	215W	15.2Kg	0.70-2.15	Tc 85°C

LEC
Light Environment Control







Polígono Industrial El Olivar, Calle Copejadores Nº 2 · 11160 Barbate (Cádiz) España-Spain


Tel.: +34 956 454 130 ·



“Empresa certificada en diseño y fabricación de luminarias LED”



 IP-65	Ref.					
DRIVER (LCV/LVI.4M.16000)	LECLAY0110CFNT000	198-305 V	50/60 Hz	0.54-0.35A	Tw 80°C	Tc 85°C
DRIVER (LCV/LVI.4M.20000)	LECLAY0165CFNT000	198-305 V	50/60 Hz	0.82-0.53A	Tw 80°C	Tc 85°C
DRIVER (LCV/LVI.4M.21800)	LECFAM0042CFNT013	100-305 V	50/60 Hz	2.15-0.70A	Tw 80°C	Tc 85°C

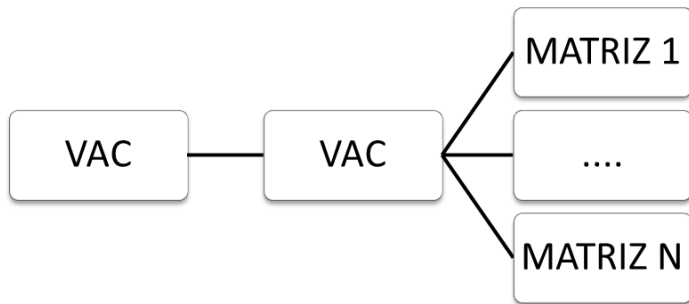

1/2

